



TOSUN-TC1026P

tosunai.com



@

TCSLN15

b

•
•
•

•
•

•
•


•

1.





➤ CAN


➤ LIN

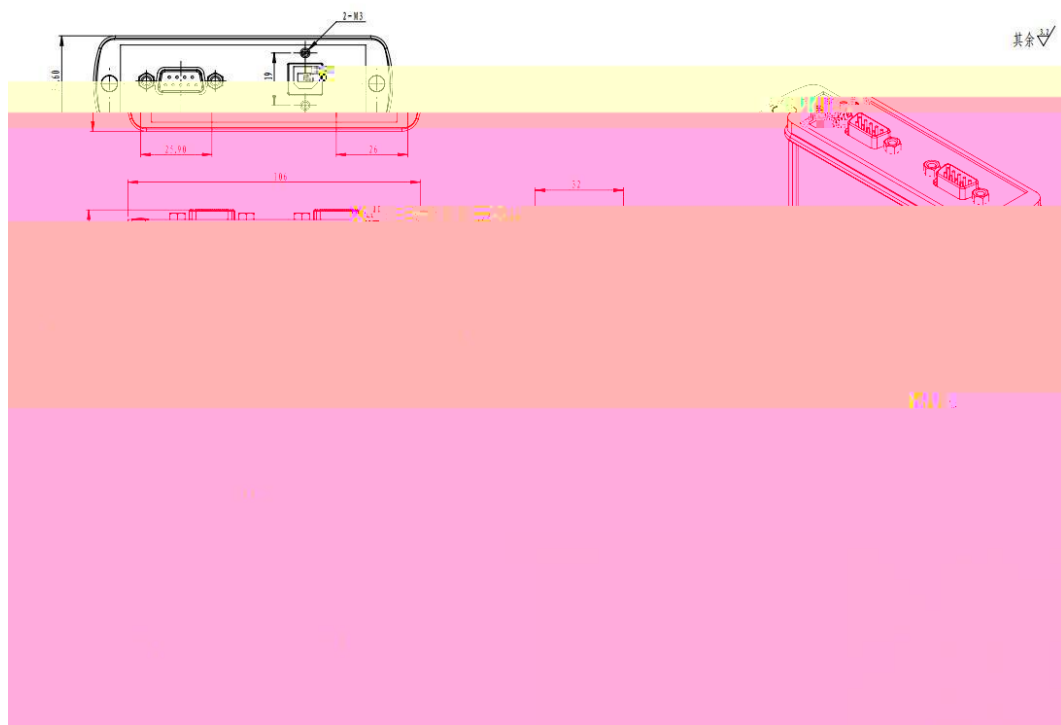

➤ CAN

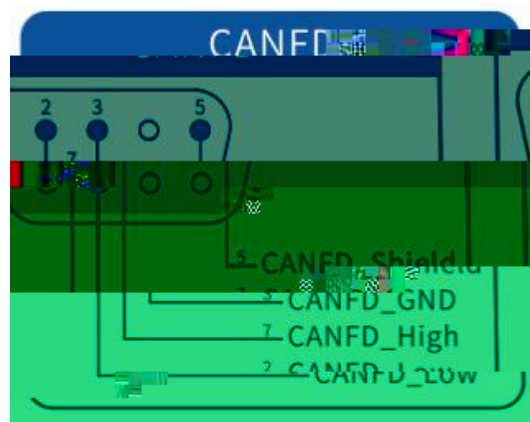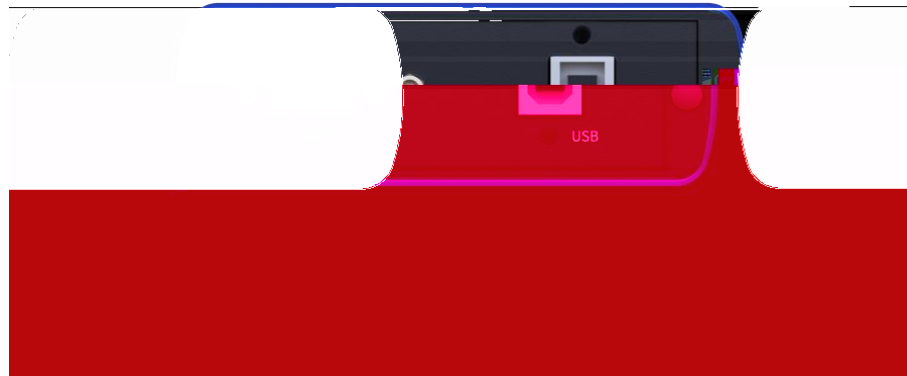

➤ LIN

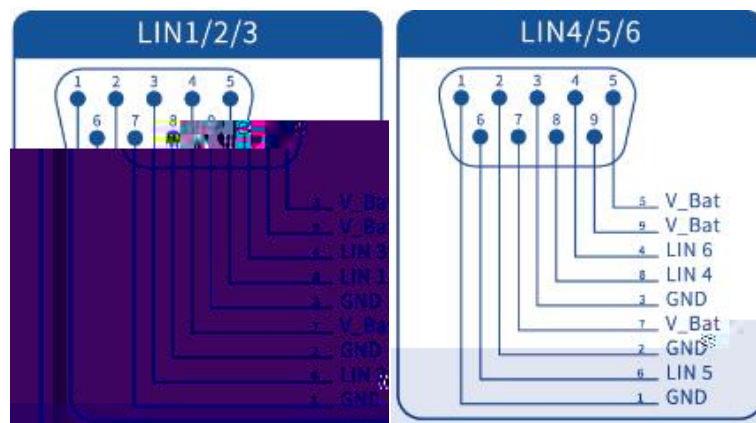
















/			/
			
			
			
			
			
			


2.

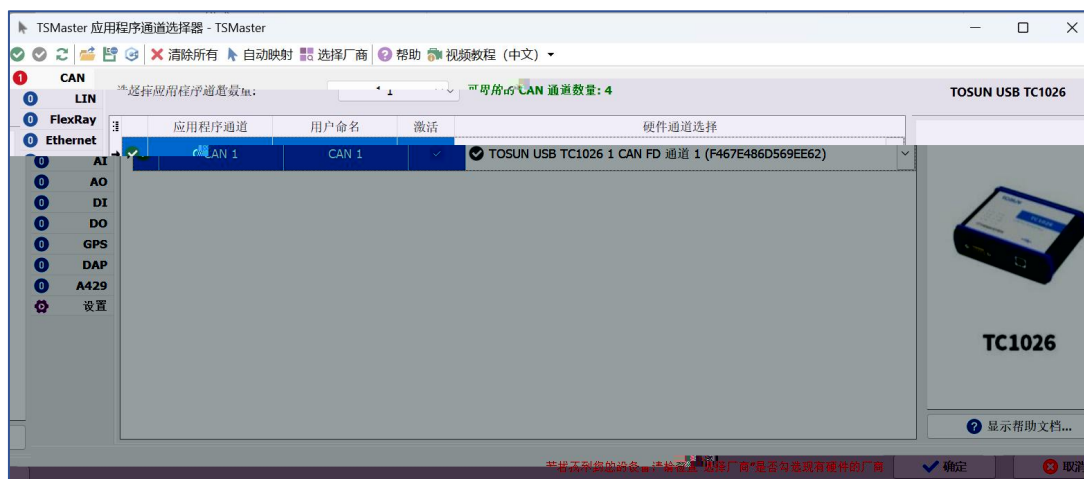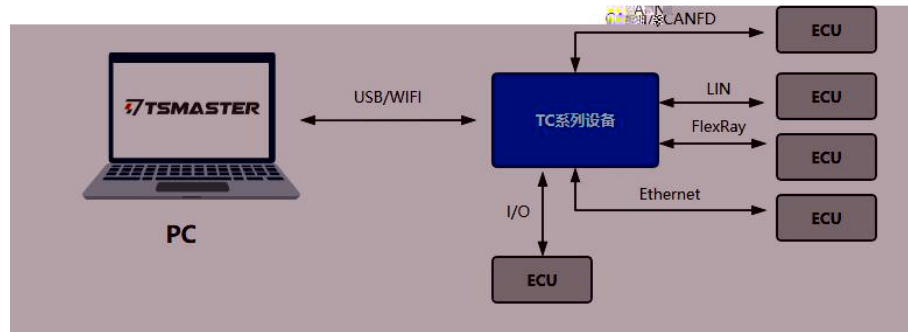

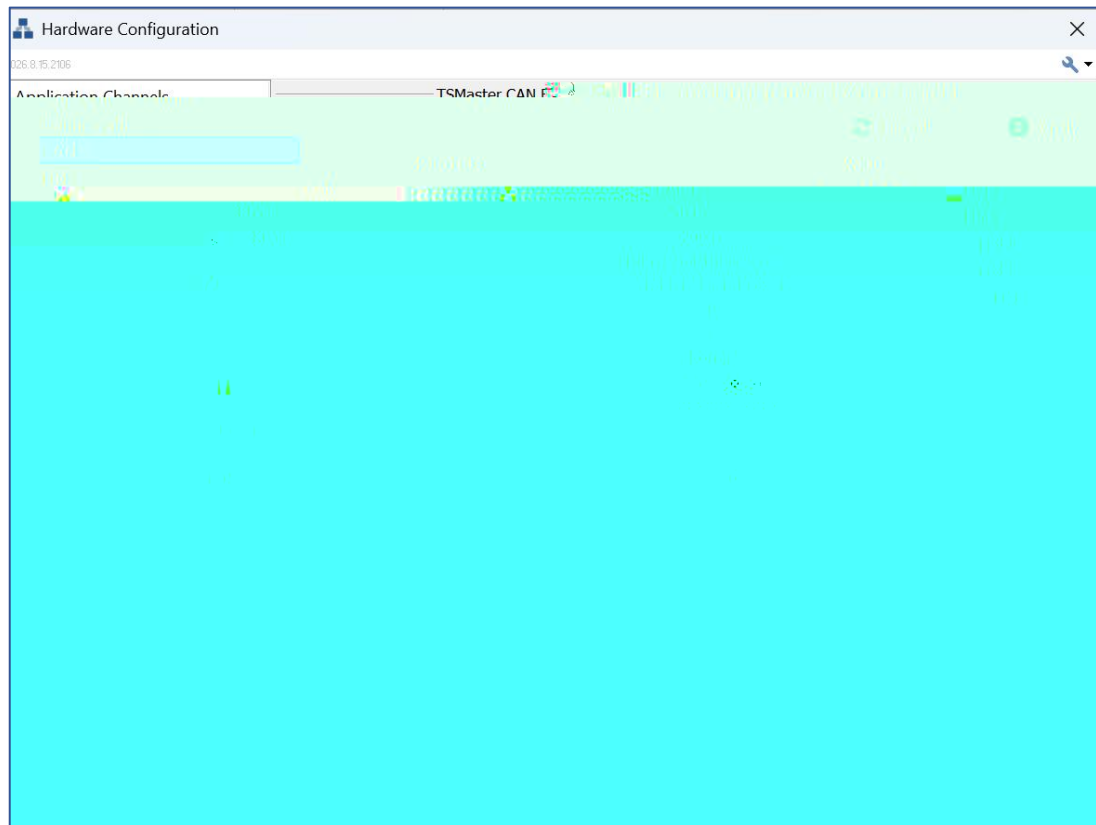

2.3.1. CAN




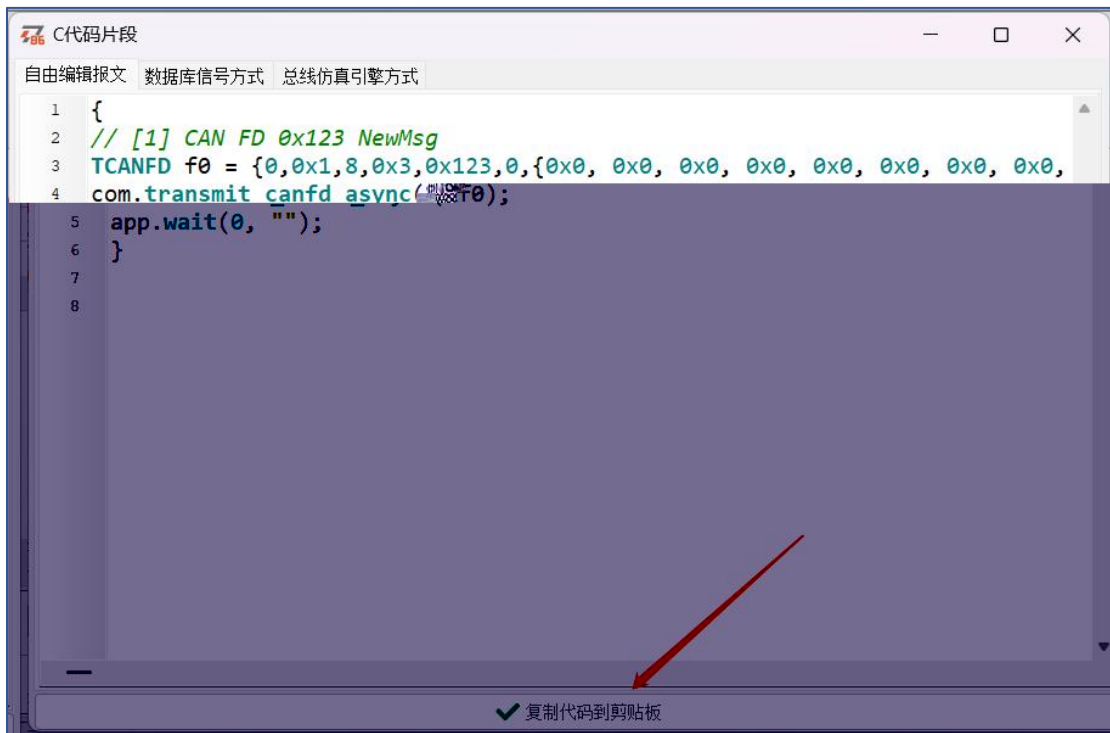




2.3.2. LIN





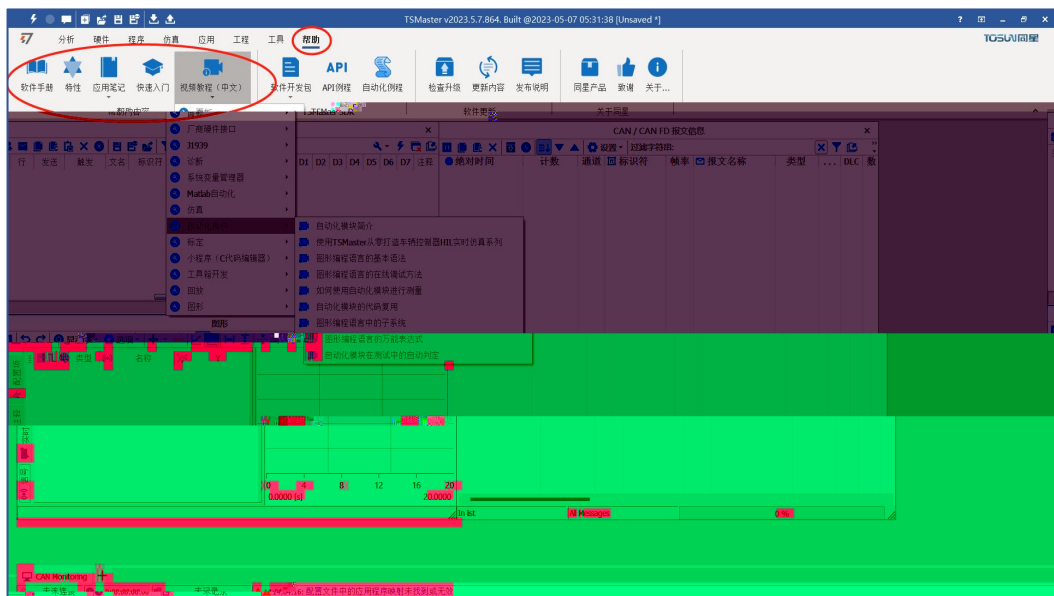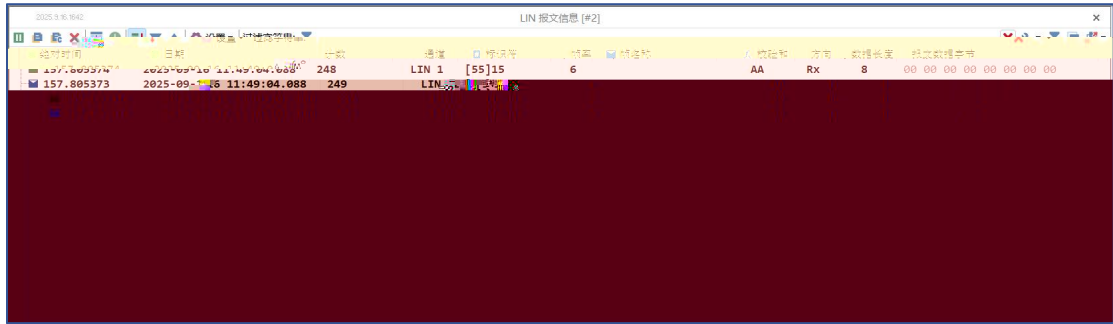




2.5.1. Python



Windows32 Python:


Windows64 Python / Linux:

2.5.2. C



2.5.3.


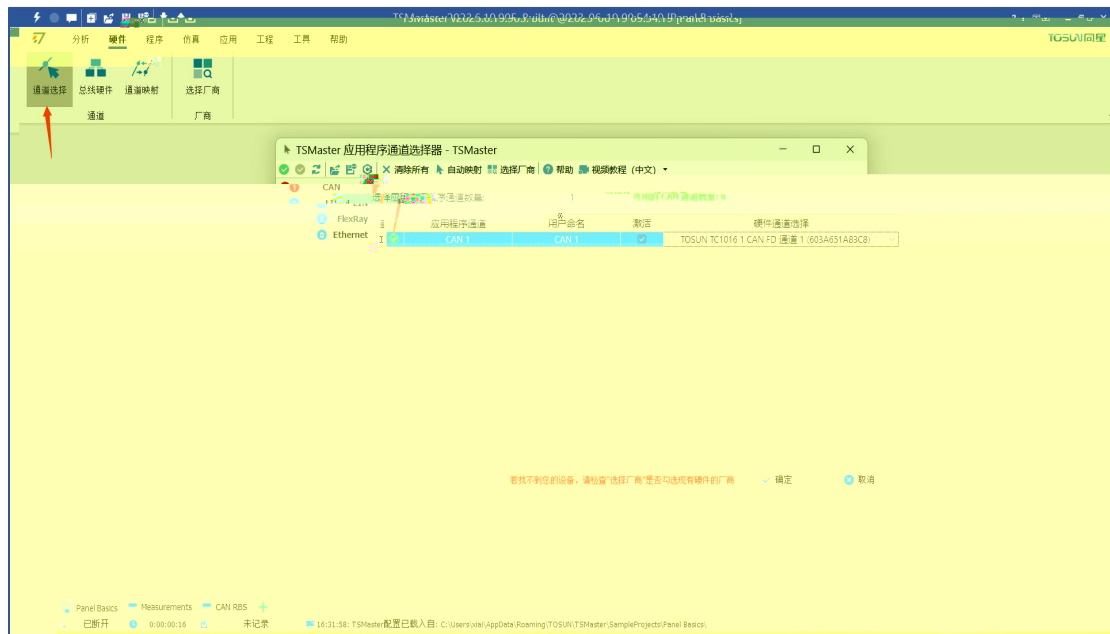


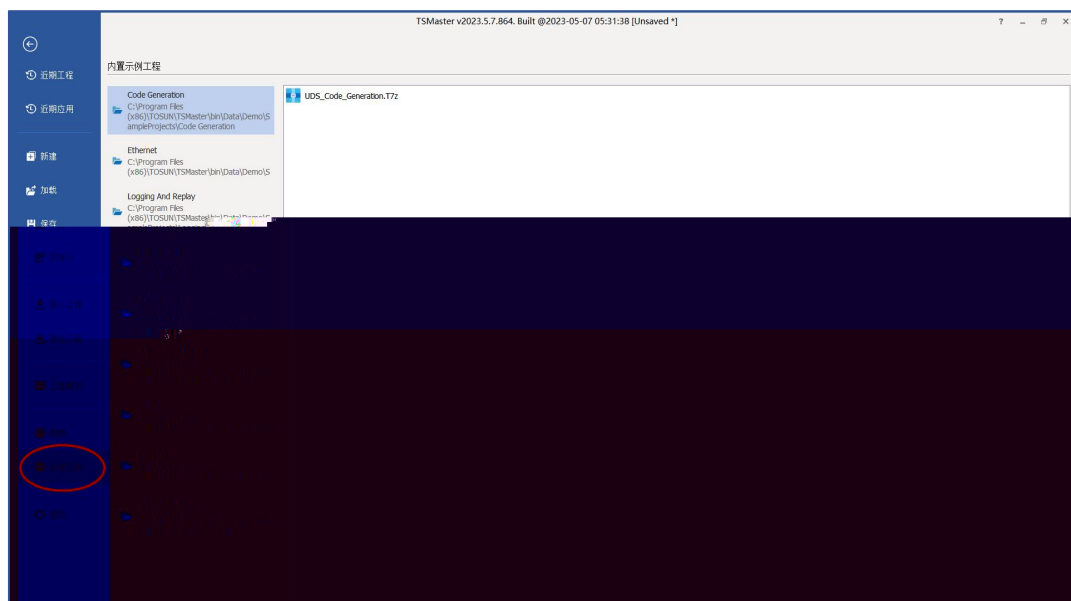

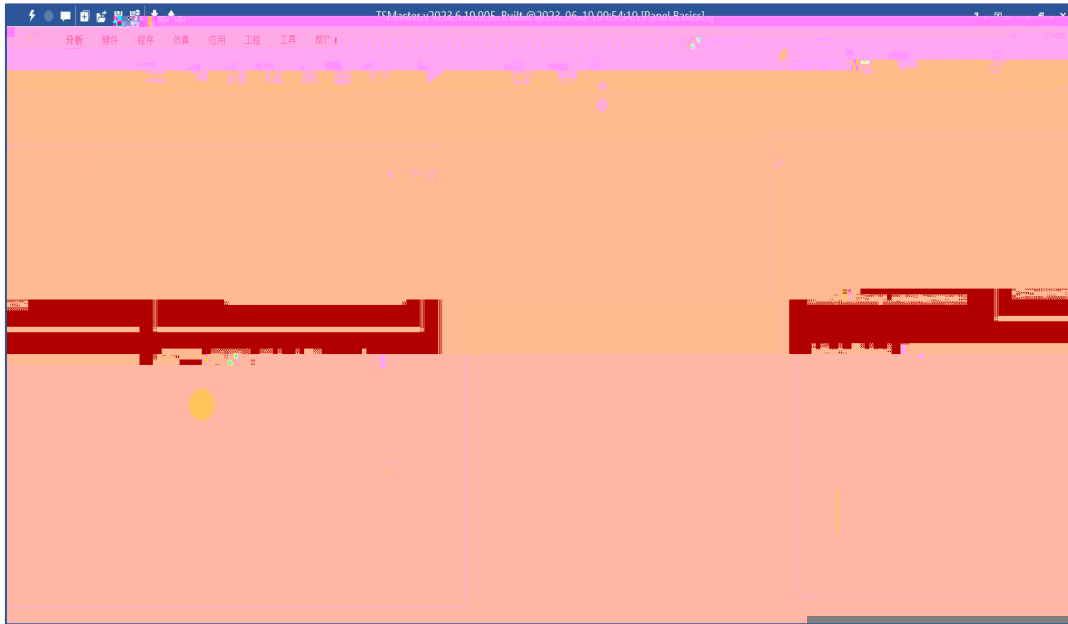


3.

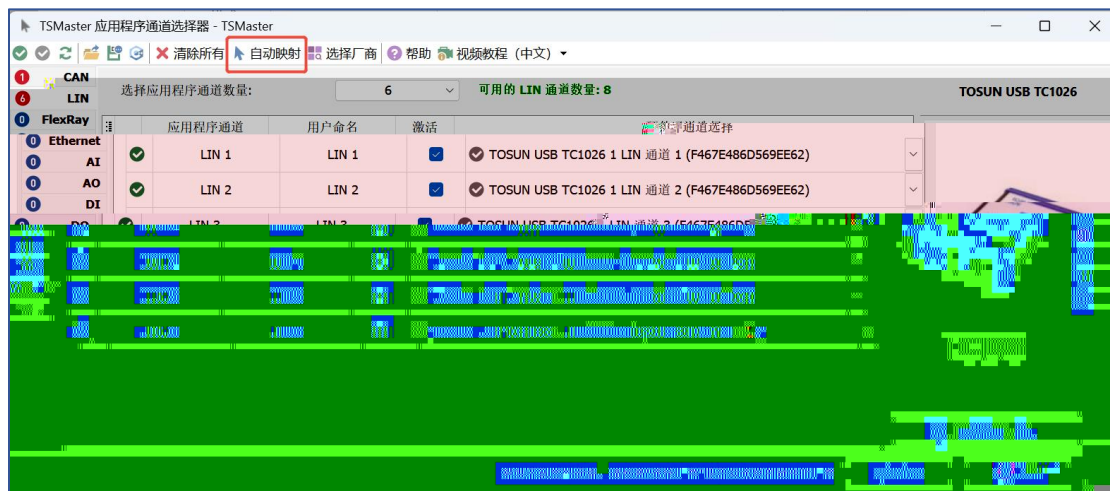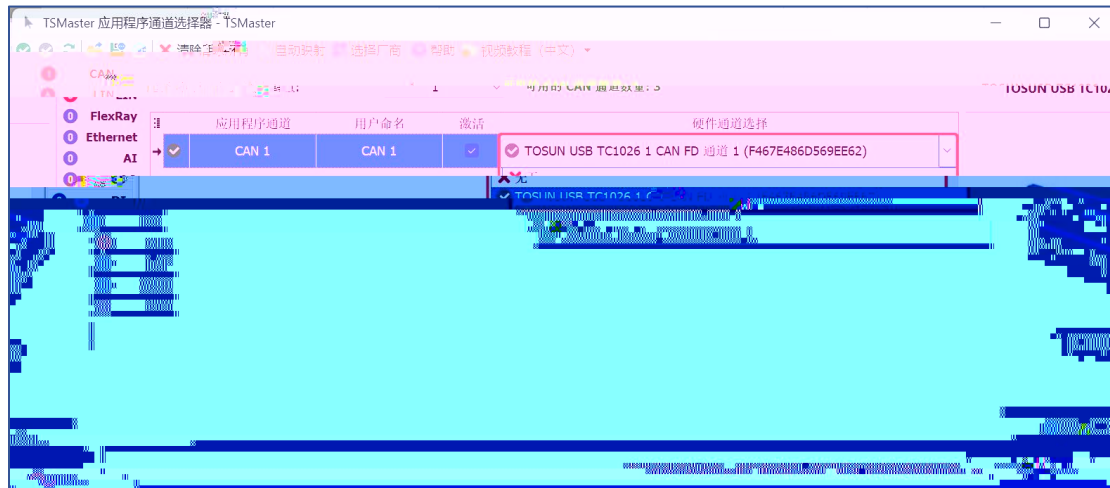


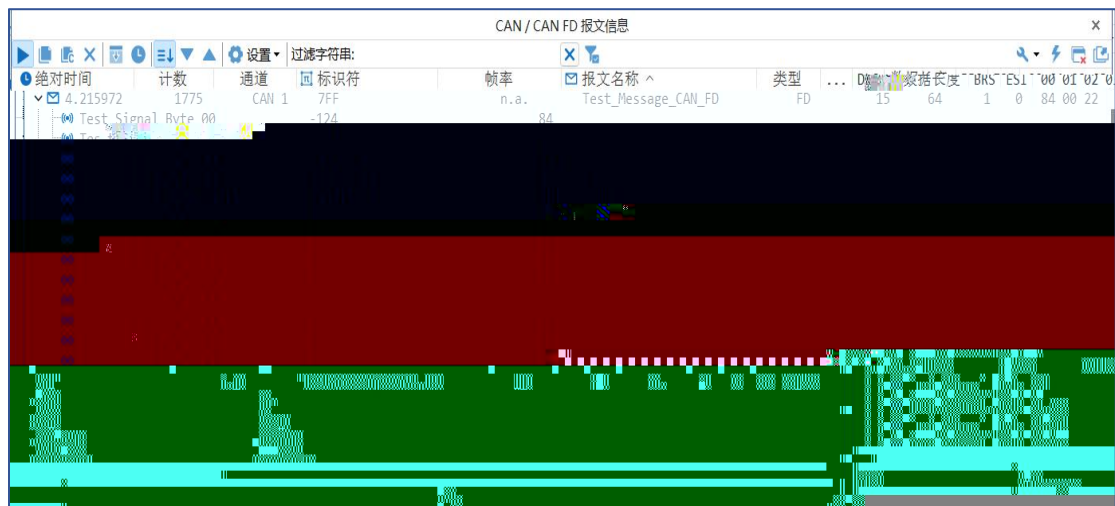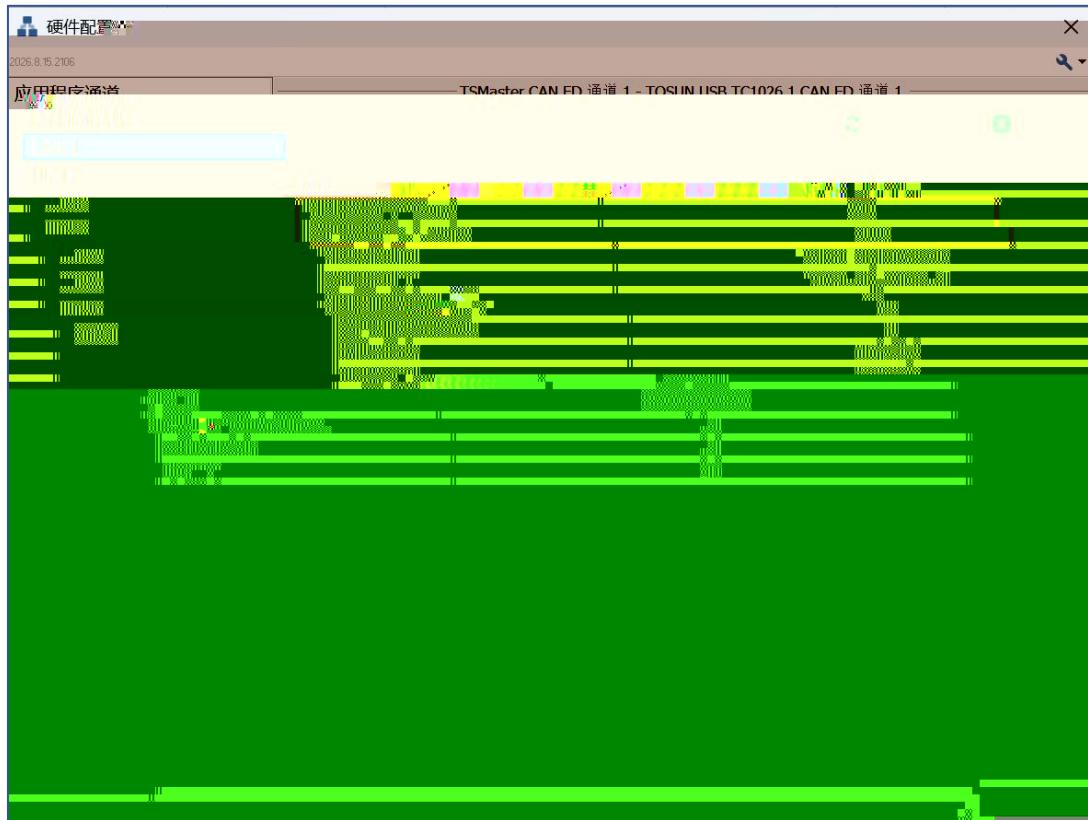

CAN / CAN FD 报文信息



绝对时间	计数	通道	标识符	帧率	报文名称	类型	DLC	数据长度	BRS	ESI	00	01	02
> 4.215972	1775	CAN 1	7FF	n.a.	Test_Message_CAN_FD	FD	15	64	1	0	84	00	22
> 4.215972	1776	CAN 2	7FF	n.a.	Test_Message_CAN_FD	FD	15	64	1	0	84	00	22
> 4.295643	1809	CAN 1	065	n.a.	EngineStatus	FD	12	24	1	0	00	00	12
> 4.295643	1810	CAN 2	065	n.a.	EngineStatus	FD	12	24	1	0	00	00	12
> 0.016505	5	CAN 1	123	n.a.	数据帧	数据帧	8	8	-	-	00	00	00
> 0.016505	6	CAN 2	123	n.a.	数据帧	数据帧	8	8	-	-	00	00	00
> 0.016599	8	CAN 2	51A	n.a.	NM_Gateway_PowerTrain	FD	4	4	1	0	00	00	00
> 4.295758	1811	CAN 1	608	n.a.	DiagResponse_Motor	FD	8	8	1	0	11	12	00
> 4.295759	1812	CAN 2	608	n.a.	DiagResponse_Motor	FD	8	8	1	0	11	12	00

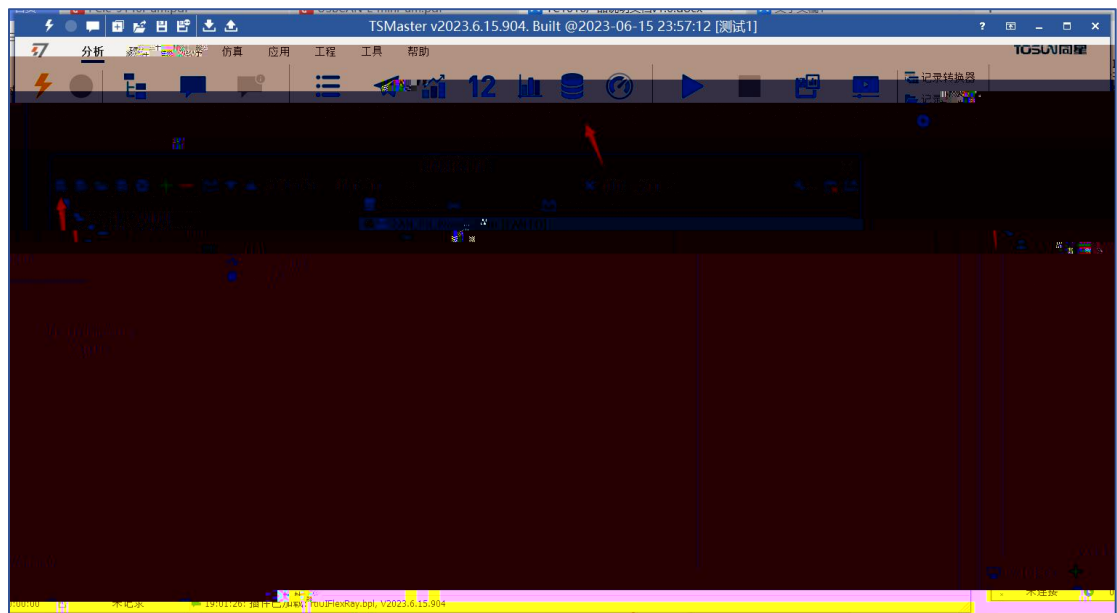

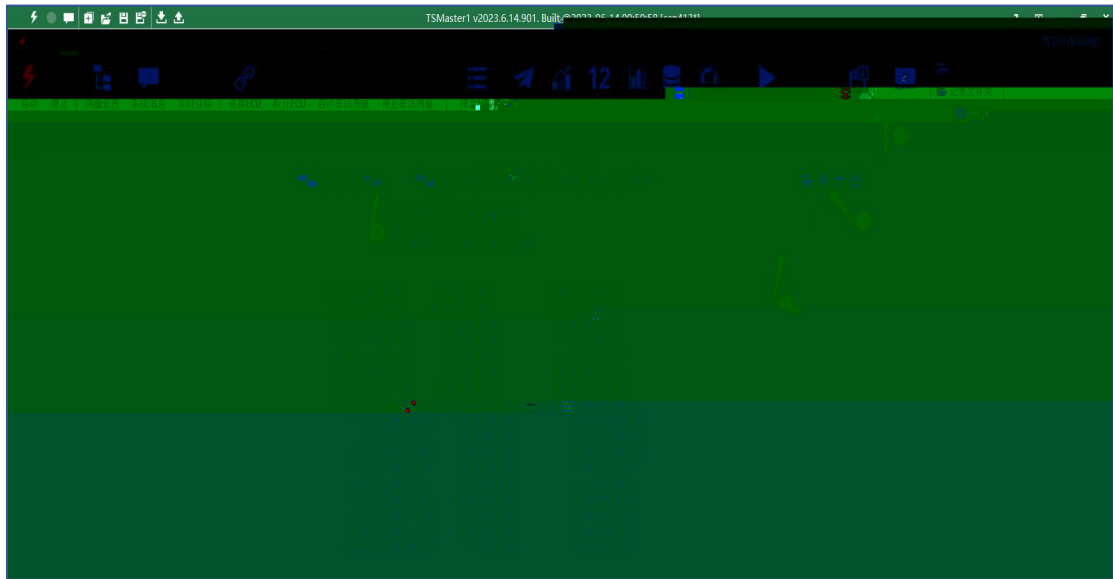

3.5.



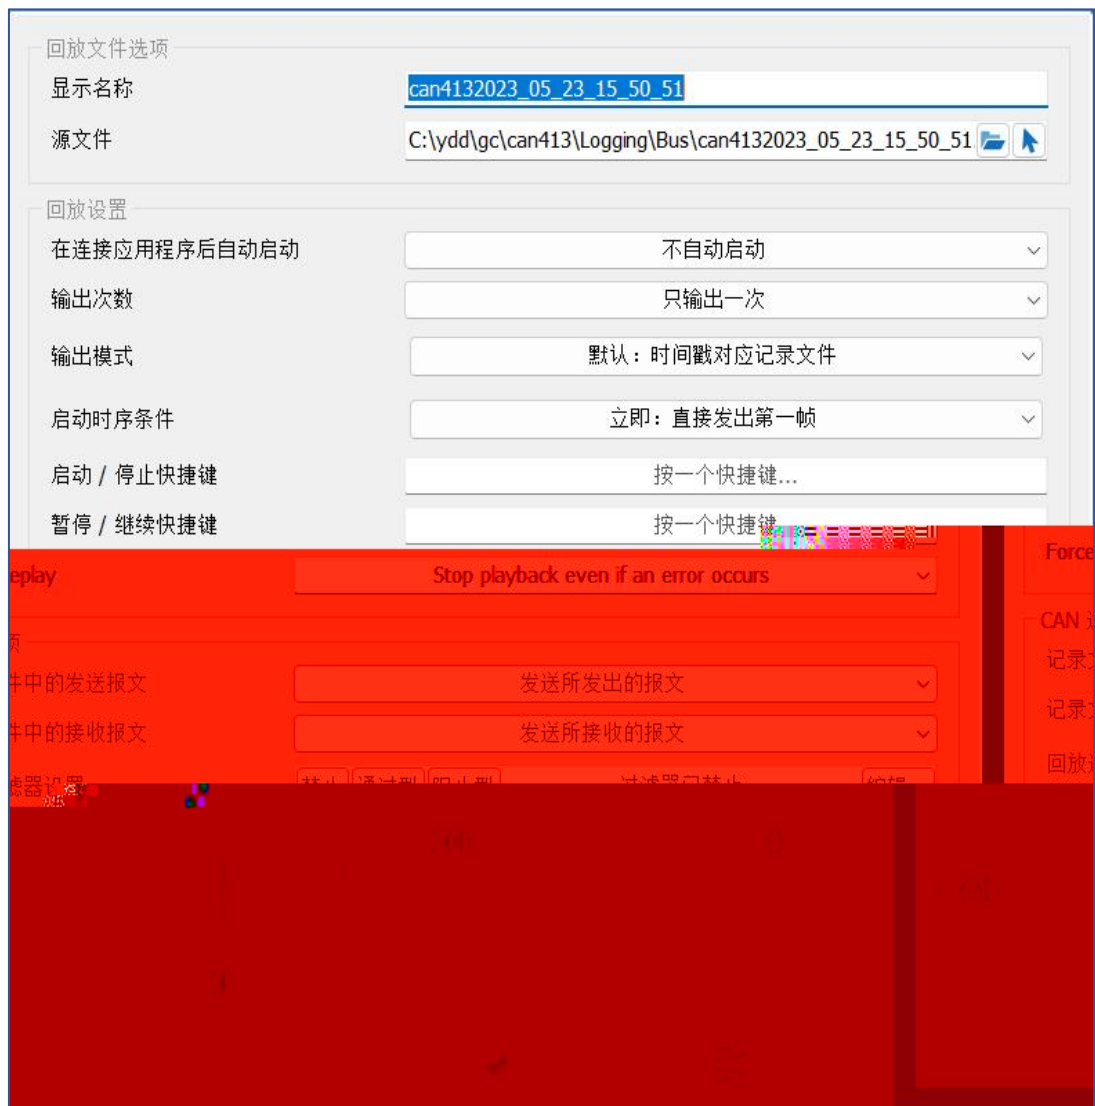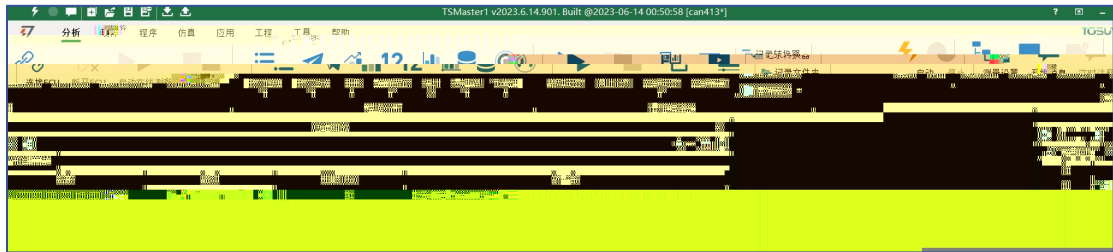

4.

--	--	--	--	--	--	--	--	--

➤ TSMaster

