



TOSUN-TC1014Pro

tosunai.com




CAN/CAN FD


DI/DO

AI/AO

CAN

EMC

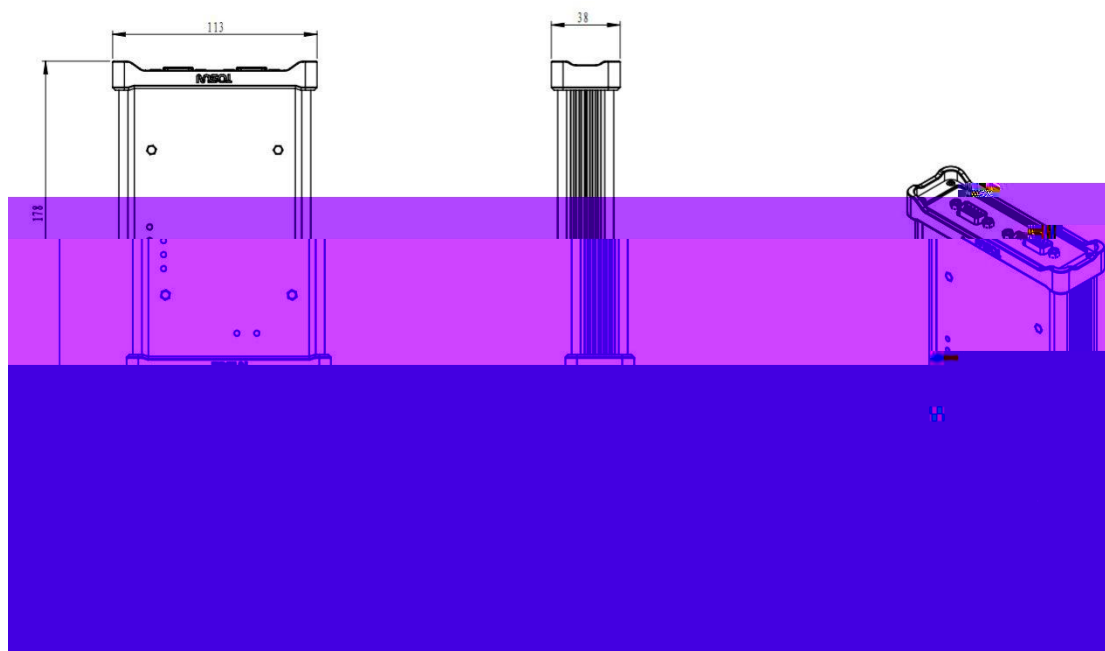

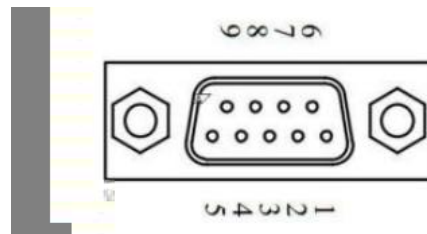






--	--	--



/			/
		 The image shows a TOSUN TC1014 Pro CANFD Interface module. It is a rectangular device with a blue top and bottom border and a white central panel. The text on the panel includes the TOSUN logo, the model name 'TC1014 Pro', and 'CANFD Interface'. Below this, it lists four channels: 'CANFD 1', 'CANFD 2', 'CANFD 3', and 'CANFD 4'. At the bottom, there are labels for 'VIO', 'GND', and 'Sync'.	
		 The image shows a black USB to CANFD cable. It has a standard USB-A connector on one end and a CANFD connector on the other.	
		 The image shows a black power adapter with a two-prong AC input and a power cable with a DC output connector.	
		 The image shows a white CANFD to CANFD cable. It has two identical CANFD connectors on both ends.	
		 The image shows a green CANFD connector module. It has a 15-pin D-sub connector on one side and a green terminal block on the other.	

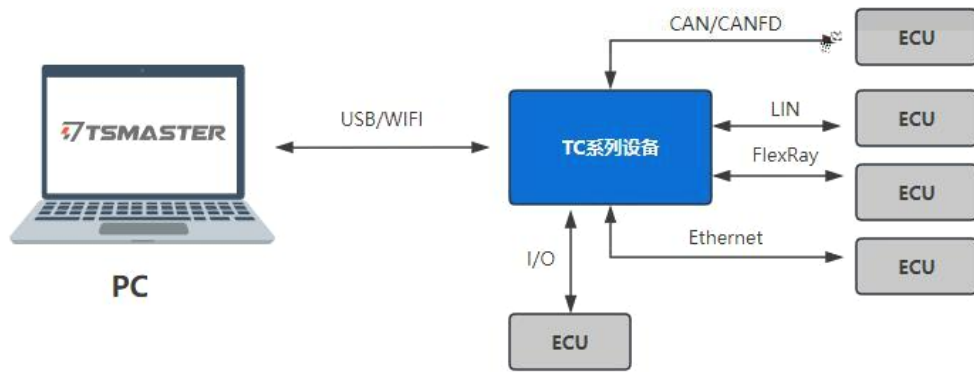

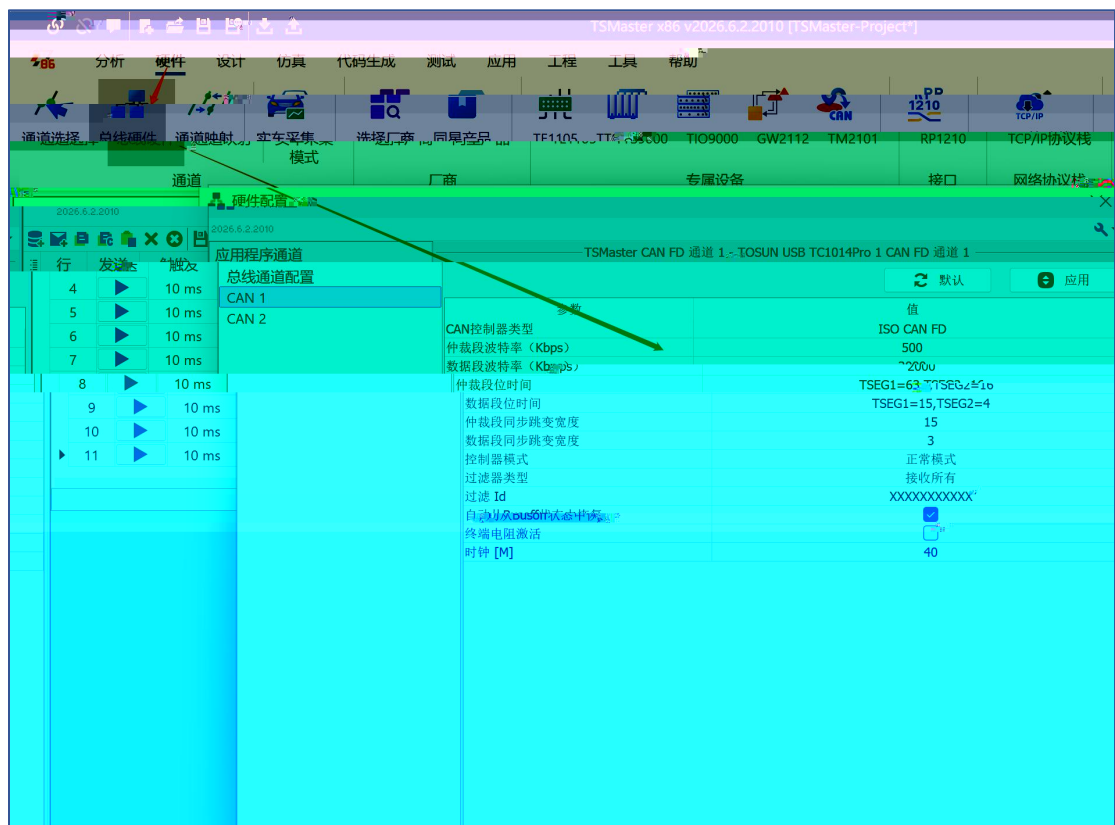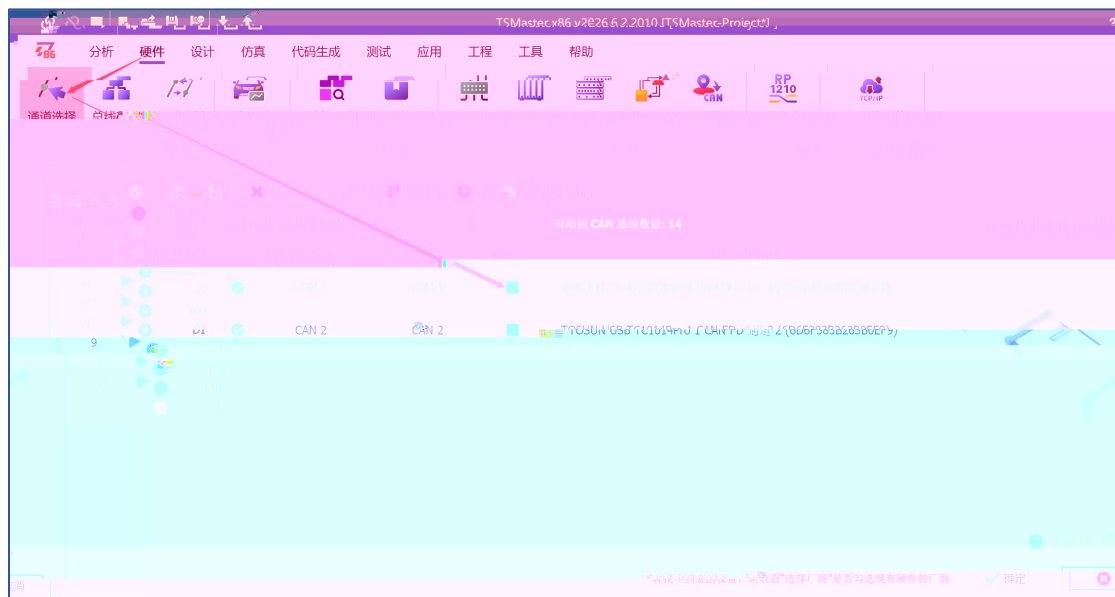



2.4.1. CAN

→ →




→ →






→ →

CAN统计数	
统计信息	通道 1
通道波特率 [Kbps]	500
总线负载率 [%]	1.13
峰值负载率 [%]	1.14
标准数据帧率 [帧/每秒]	99
标准数据帧计数	4909
扩展数据帧率 [帧/每秒]	0
扩展数据帧计数	0
标准远程帧率 [帧/每秒]	0
标准远程帧计数	0
扩展远程帧率 [帧/每秒]	0
扩展远程帧计数	0
错误帧率 [帧/每秒]	0
错误帧计数	0
控制器状态	错误主动
发送错误计数	95

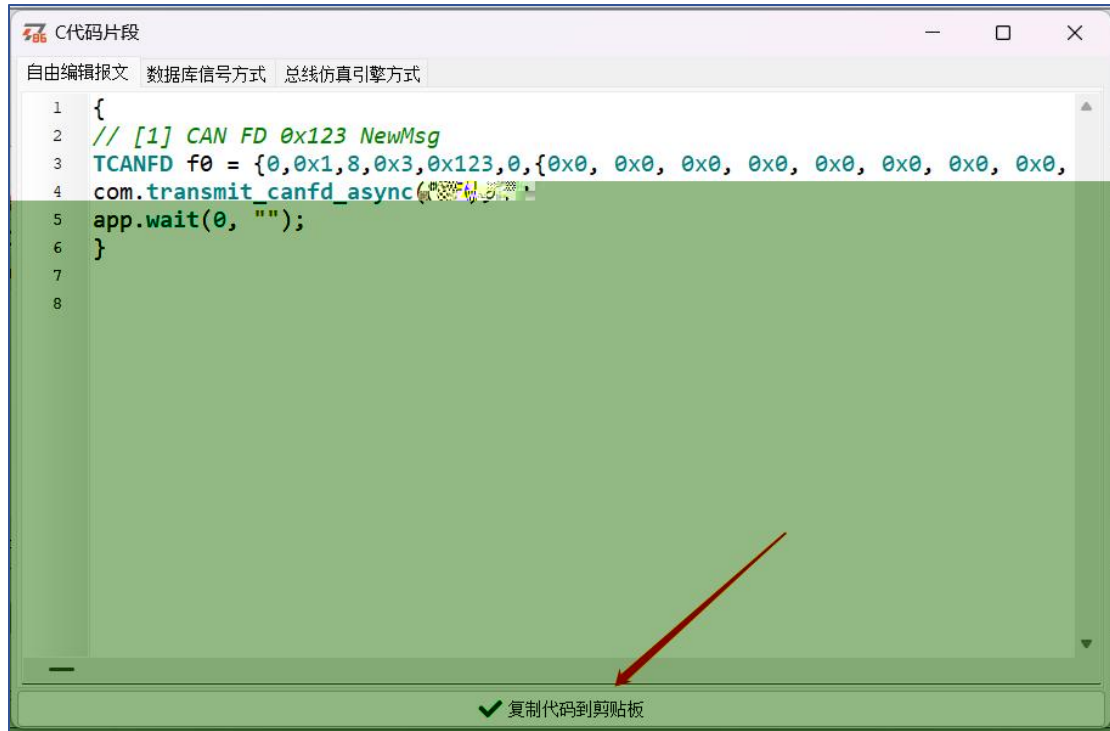


→ →


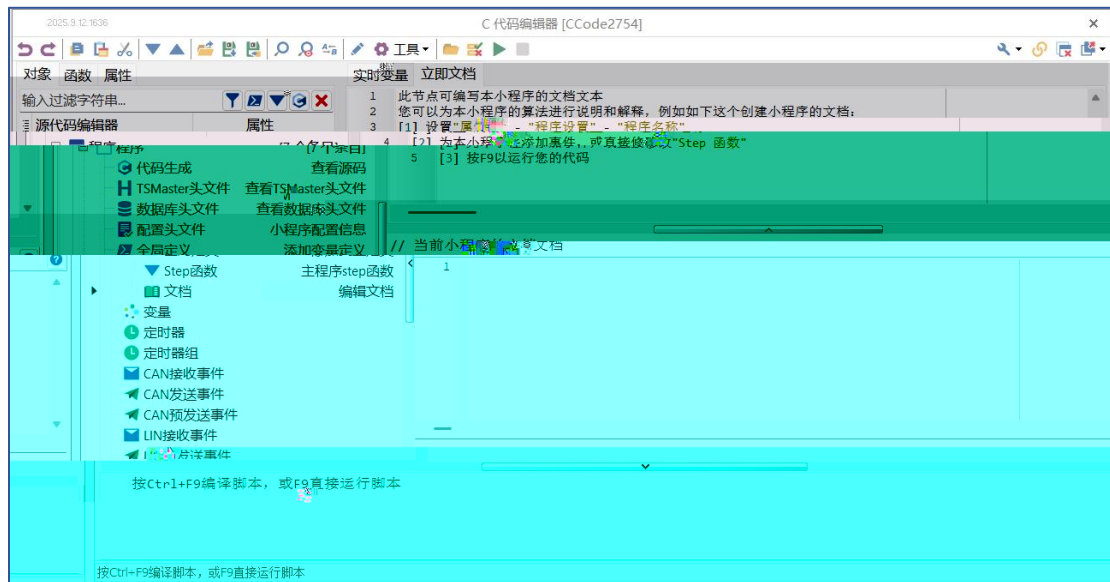


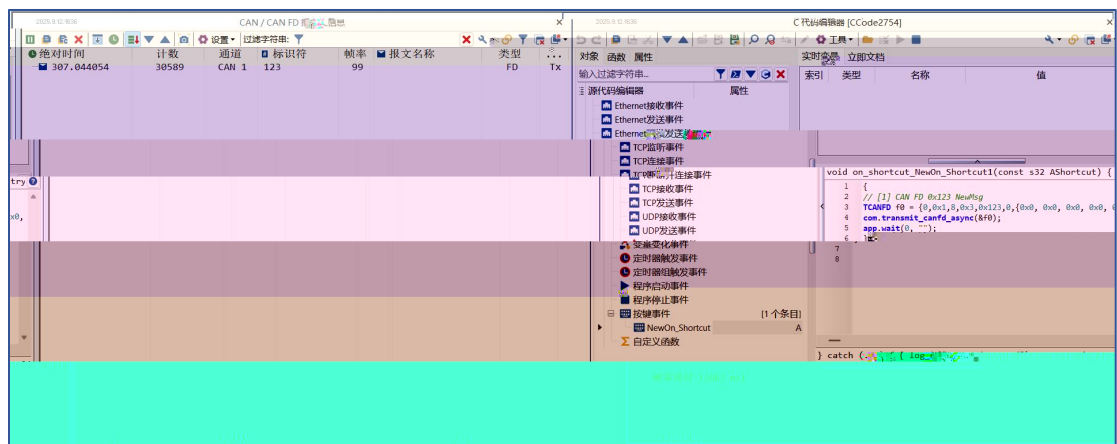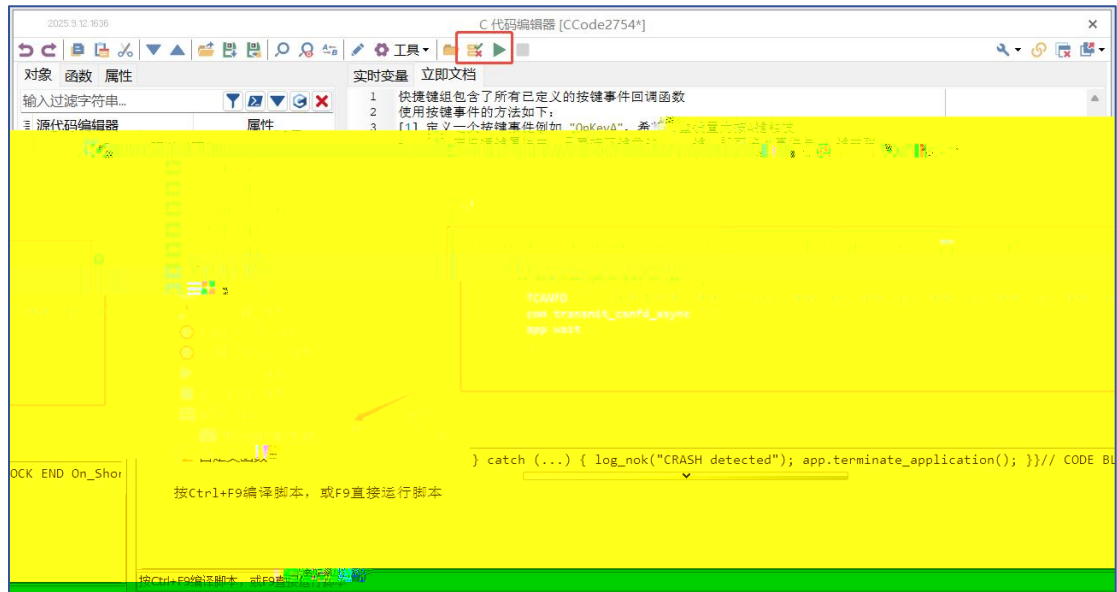





TSMaster

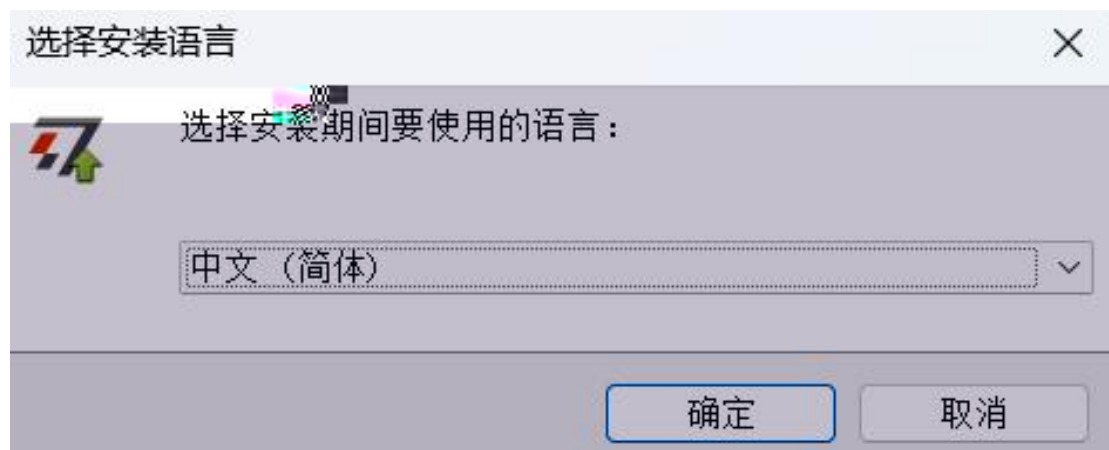

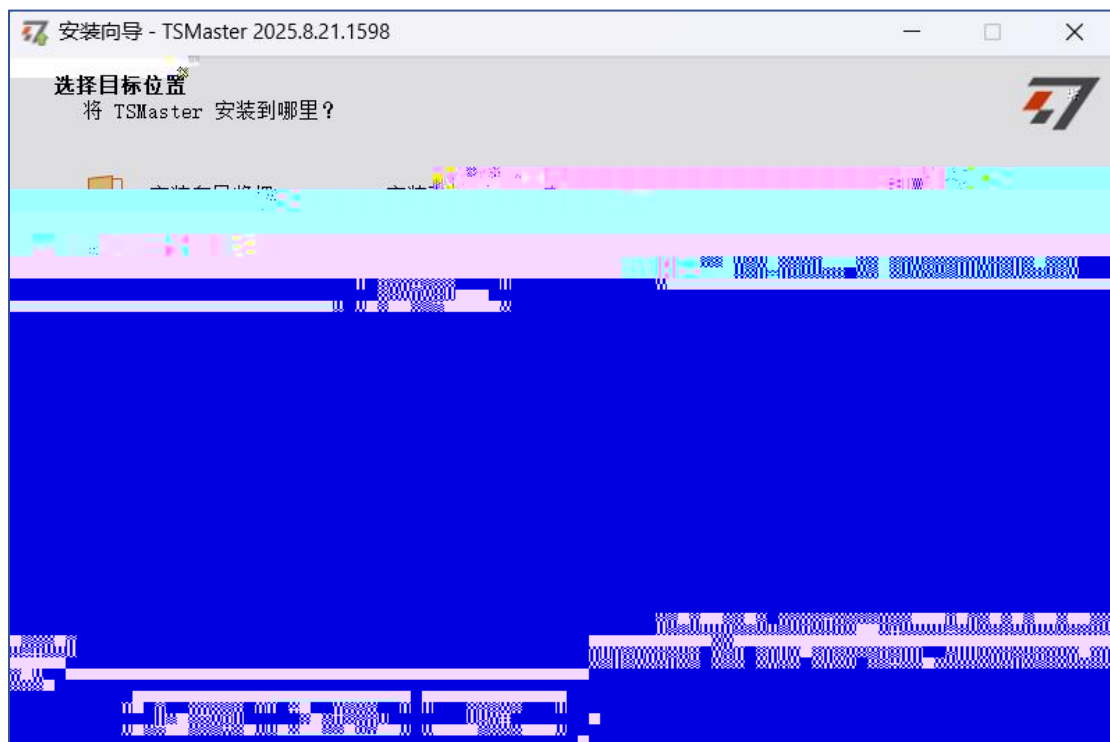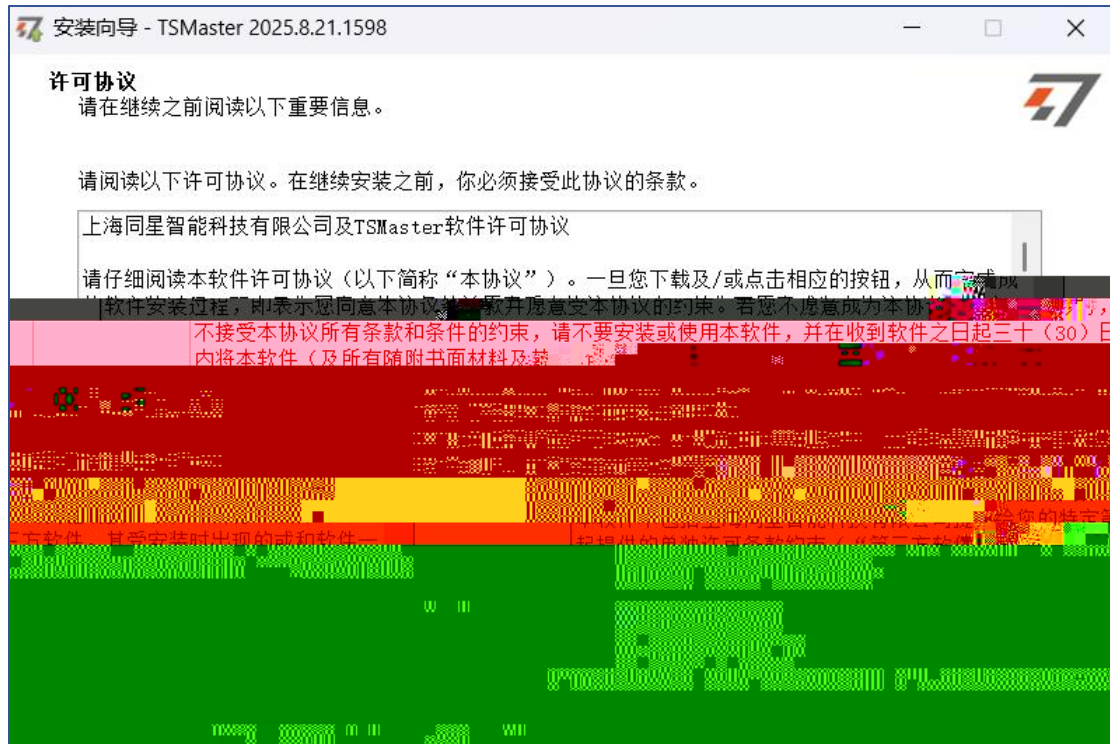

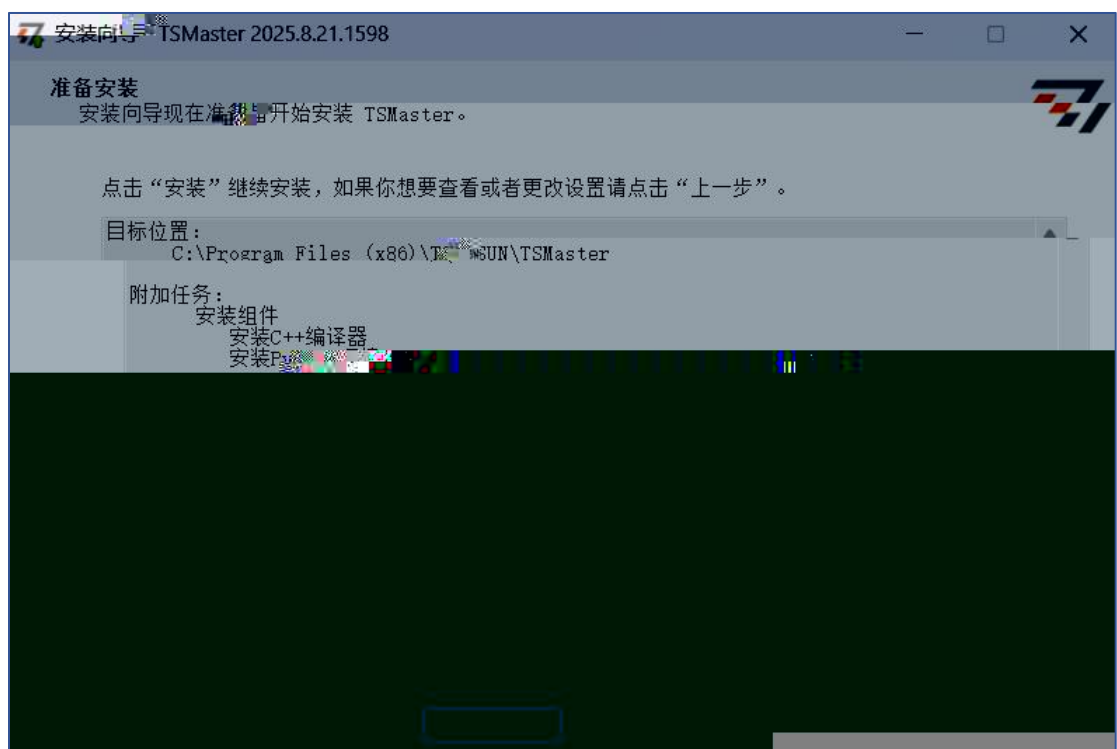

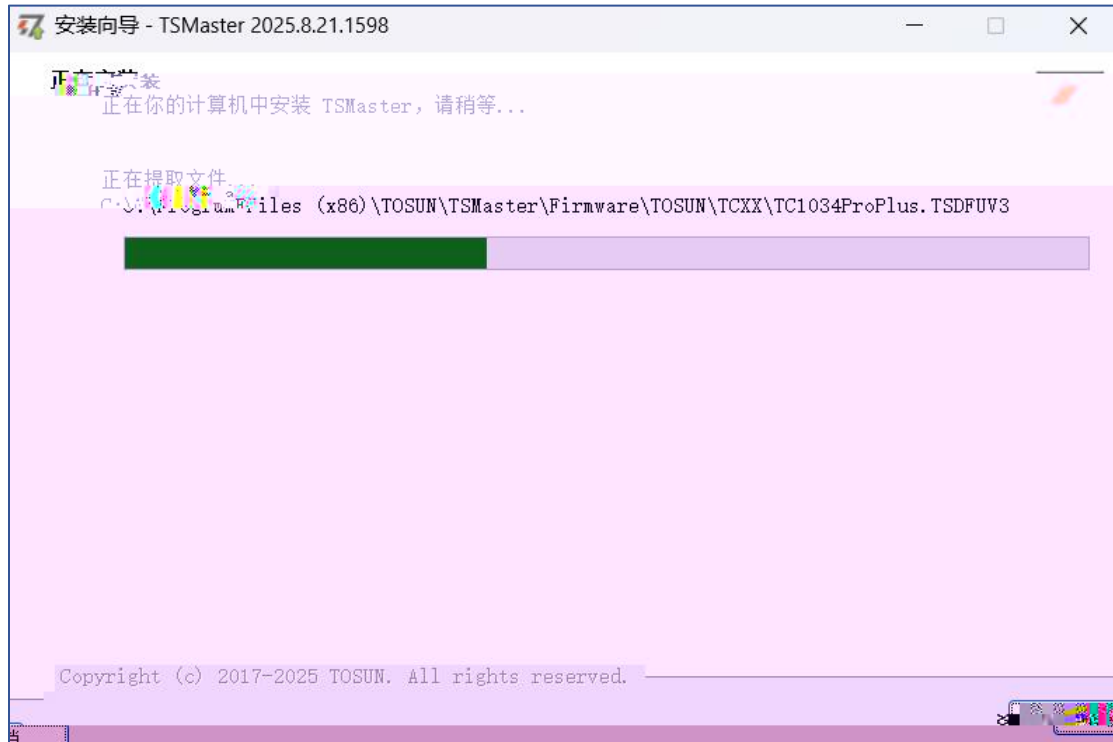

		/	/

		/	/

		/	/
--	--	---	---

