


TC3014

Multi-channel CAN/CAN FD communication tool

T U

F S

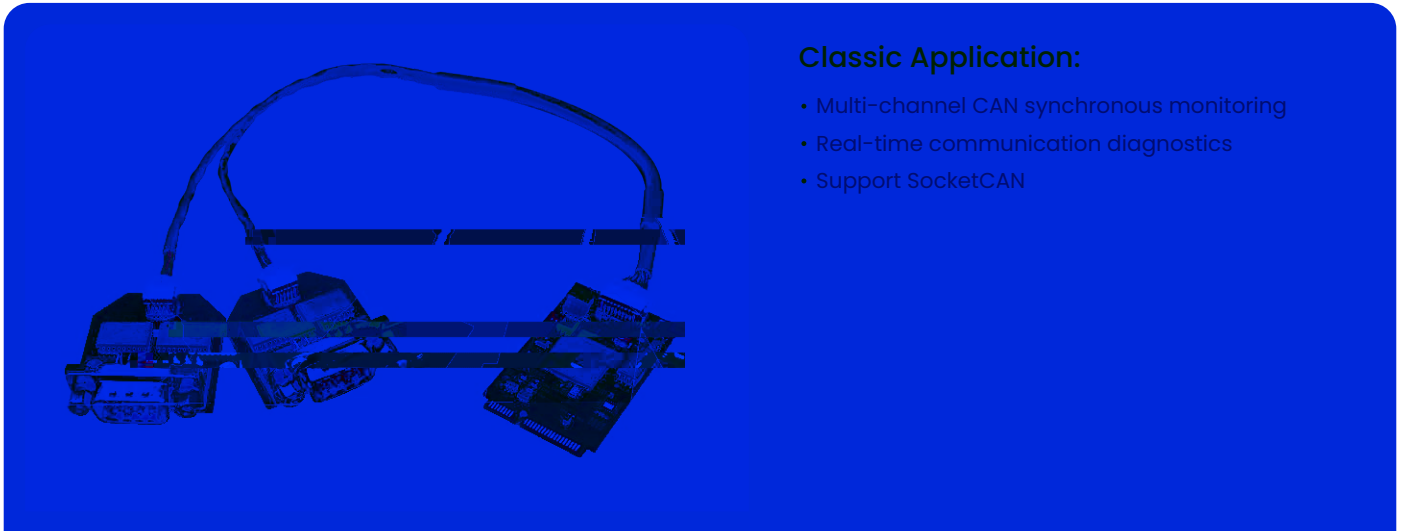

Classic Application:

- Multi-channel CAN synchronous monitoring
- Real-time communication diagnostics
- Support SocketCAN

F

N

The TC3014 is a multi-channel CAN/CAN FD communication tool based on SocketCAN.

It features four independent and isolated CAN/CAN FD interfaces, enabling CAN communication as easily and

NI NS

Supported Protocols	CAN 2.0 A/B (ISO 11898-1), CAN FD (ISO and non-ISO)
CAN Baud Rate	125 Kbps ~ 1 Mbps
CAN Frame Data Length	Up to 8 bytes
CAN FD Baud Rate	125 Kbps ~ 5 Mbps (8 Mbps optional)
CAN FD Frame Data Length	Up to 64 bytes; supports BRS frames
Channel	4 x CAN/CAN FD
Buffer	Each channel supports a transmit buffer of up to 1000 CAN frames

NI NS

PC Interface	Mini PCIe interface (USB channel)
Driver	Linux driver support
Buffer	Each channel supports a transmit buffer of up to 1000 CAN frames
Connector	Standard D-Sub, 9-pin
CAN	Supports CAN 2.0 A/B protocols (ISO 11898-1 compliant); baud rate 125 Kbps ~ 1 Mbps
CAN FD	Supports both ISO and non-ISO CAN FD standards; baud rate 125 Kbps ~ 5 Mbps (8 Mbps optional)
Power Supply	Powered via Mini PCIe
Power Consumption	2 W
Sample Point Range	Adjustable from 70% ~ 90%
	X
Weight	Unpackaged
Operating Humidity	10% ~ 90% (non-condensing)
Operating Environment	Keep away from corrosive gases

SN SN F NS

Product Name	Model Number	Function Description
Network Device	TC3014	Multi channel CAN/CAN FD communication tool

N SN N

- TC114 device
- USB connection cable

SN SN NS

