


TS3004

High-Performance Thermocouple DAQ



Scan the code to follow

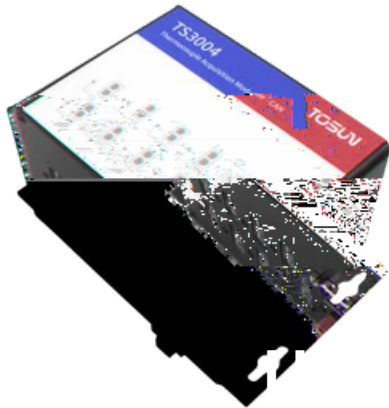

Classic Application:

- &
- &

Feature Overview

3004

200 13 0 , () .

4 .

Characteristics

- 200
- 13 0 , 4
- 0 (0)
- 1
- (...) .

Application Ecosystem:

3004

Device Specifications

Connector	Standard D S b, 9 pin
Po er S ppl	Phoeni terminal po er s ppl
Po er Cons mption	1.5 W
ESD Protection	4 kV contact discharge, 8 kV air discharge
Enclos re Material	Metal
Dimensions	150 97.6 72 mm
Weight	422.6 g
Operating Temperat re	40 C 80 C
Operating H midit	10% 90% RH (no condensing)

CAN Specifications (Default Mode)

Connection Standard	SAE J2284
S pported Protocols	SAE J2284
CAN Ba d Rate	500 kbps
Sample Point	Sa Ma di
CAN Frame Data Length	8 bytes
Termination Resistor	CA

CAN Specifications (Custom Mode)

Connection Standard	
S pported Protocols	
CAN Ba d Rate	
CAN Frame Data Length	
CAN FD Ba d Rate	
CAN FD Frame Data Length	
Termination Resistor	
B s Off A to Reco er	



Ordering information

Product Name	Model Number	Function Description
Network Device	TS3004	High-Performance Thermocouple DAQ

Shipping list

- TS3004 device
- 2-Pin flange locking connector



2-Pin flange locking connector

Pin definition

