







- 
- 
- 
- 

- 
- 



**1.1.**






--	--









**1.2.**












--	--	--	--	--	--

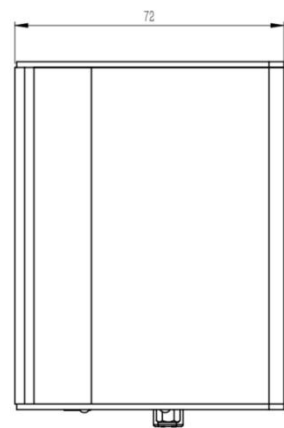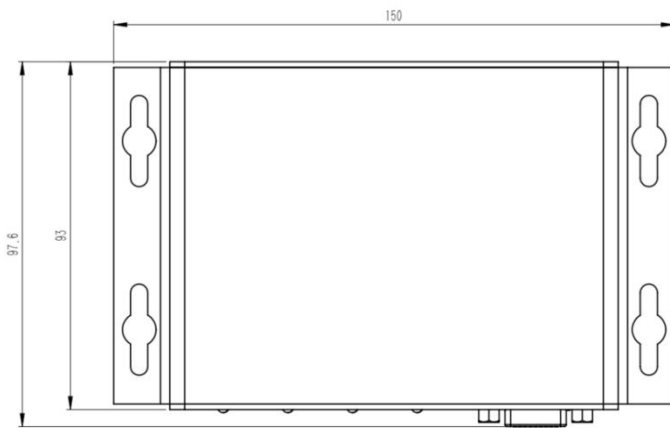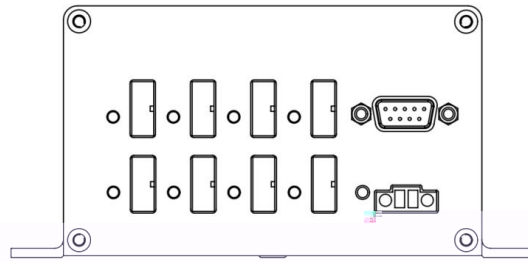



**1.3.**

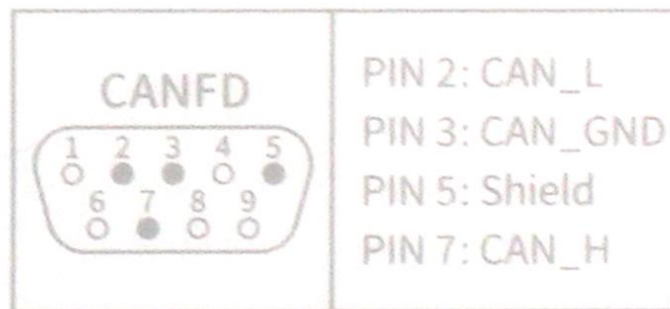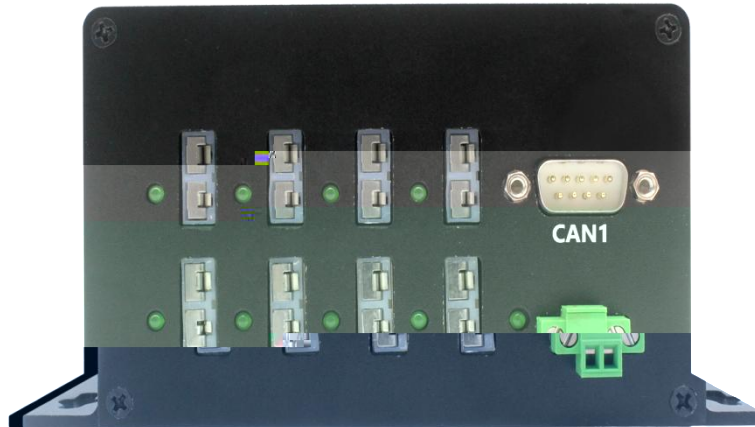

## 1.4. LED



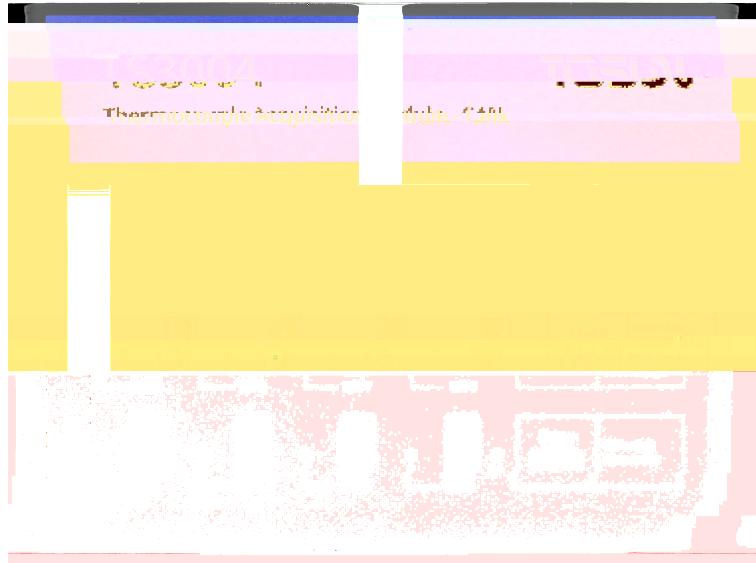


	0




- 
- 
- 
- 


**1.6.**

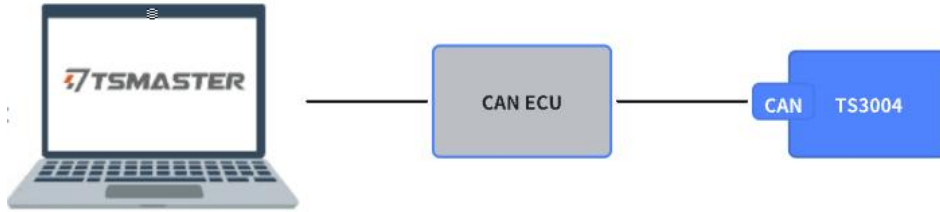

## 2.1.



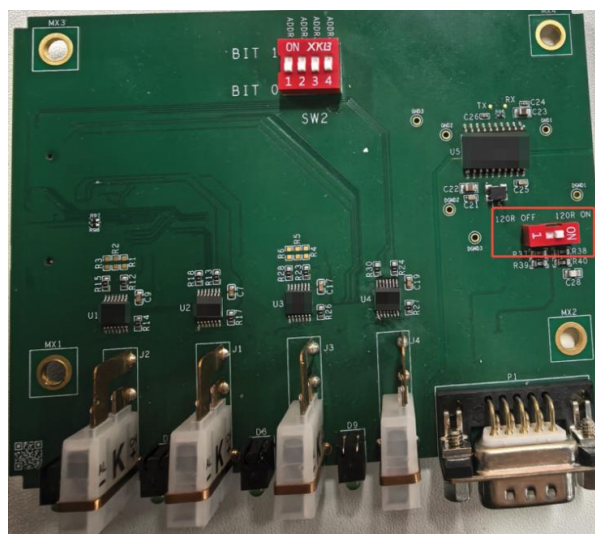
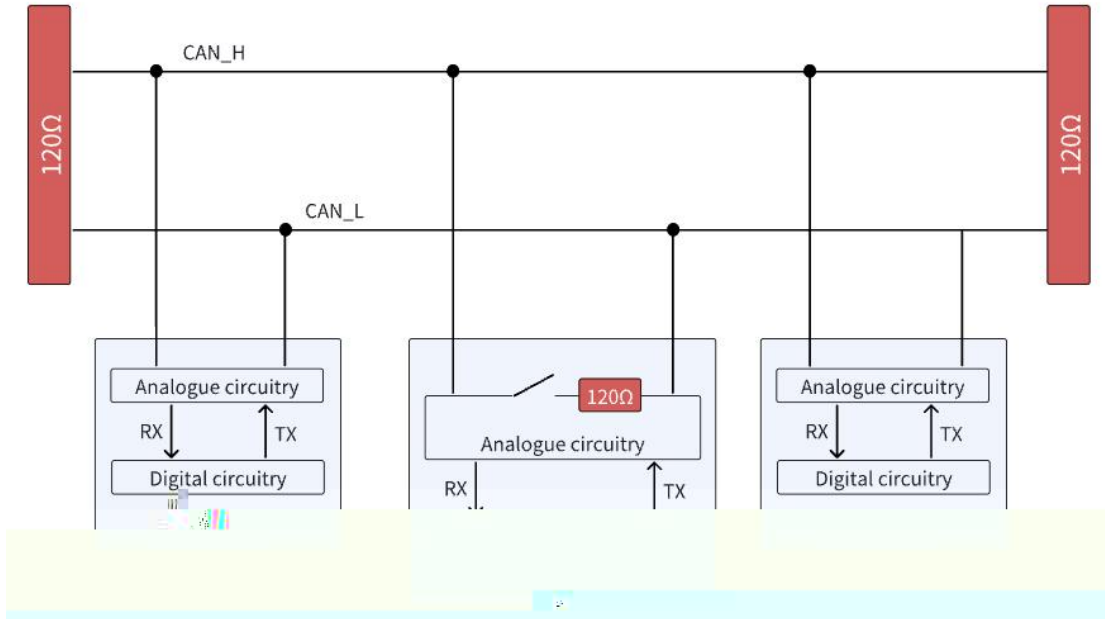
## 2.2.



硬件配置

2025.11.14.17:19

应用程序通道

总线通道配置

CAN 1

TSMaster CAN FD 通道 1 - TOSUN USB TC1016 1 CAN FD 通道 1

默认 应用

参数	值
CAN控制器类型	CAN
仲裁段波特率 (Kbps)	1000
仲裁段位时间	TSEG1=31,TSEG2=8
仲裁段同步跳变宽度	15
控制器模式	正常模式

接收所有

过滤 14

自动从Bus-off状态中恢复

终端电阻激活

2.3.

- 
- 
- 




---








--	--



--	--




### 3.1.

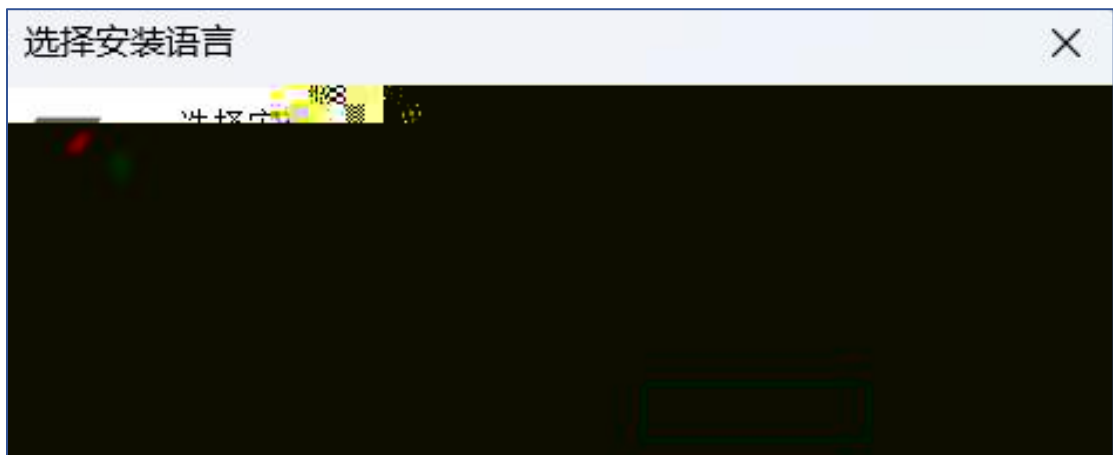

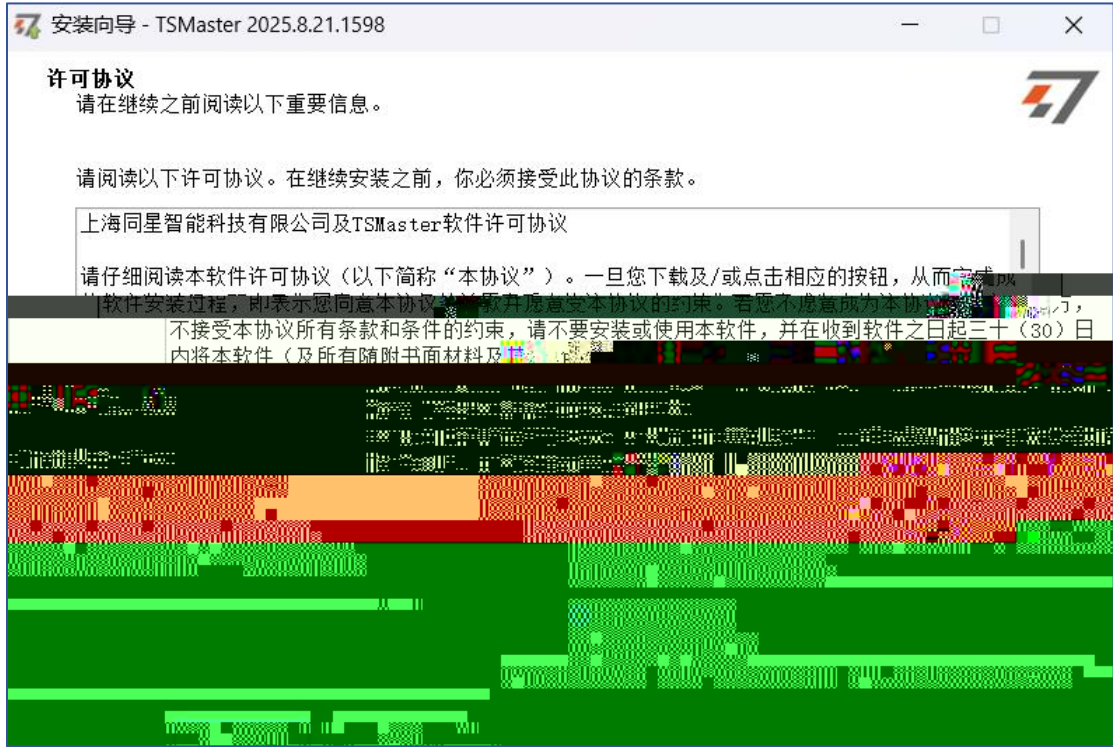

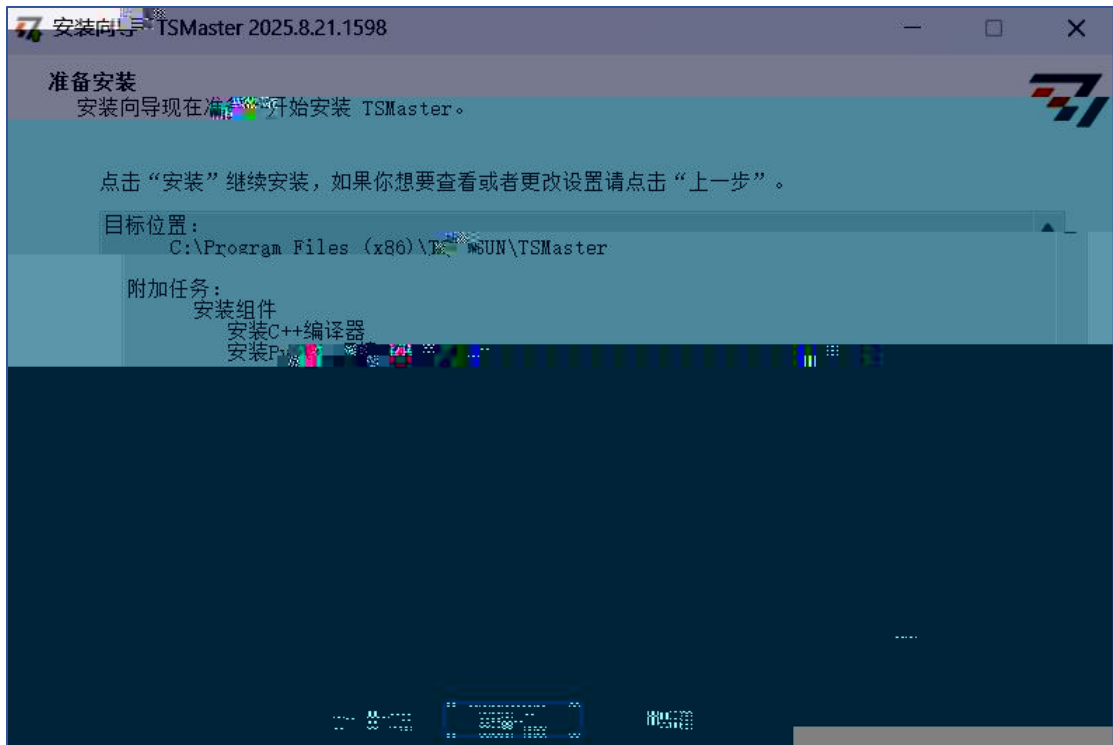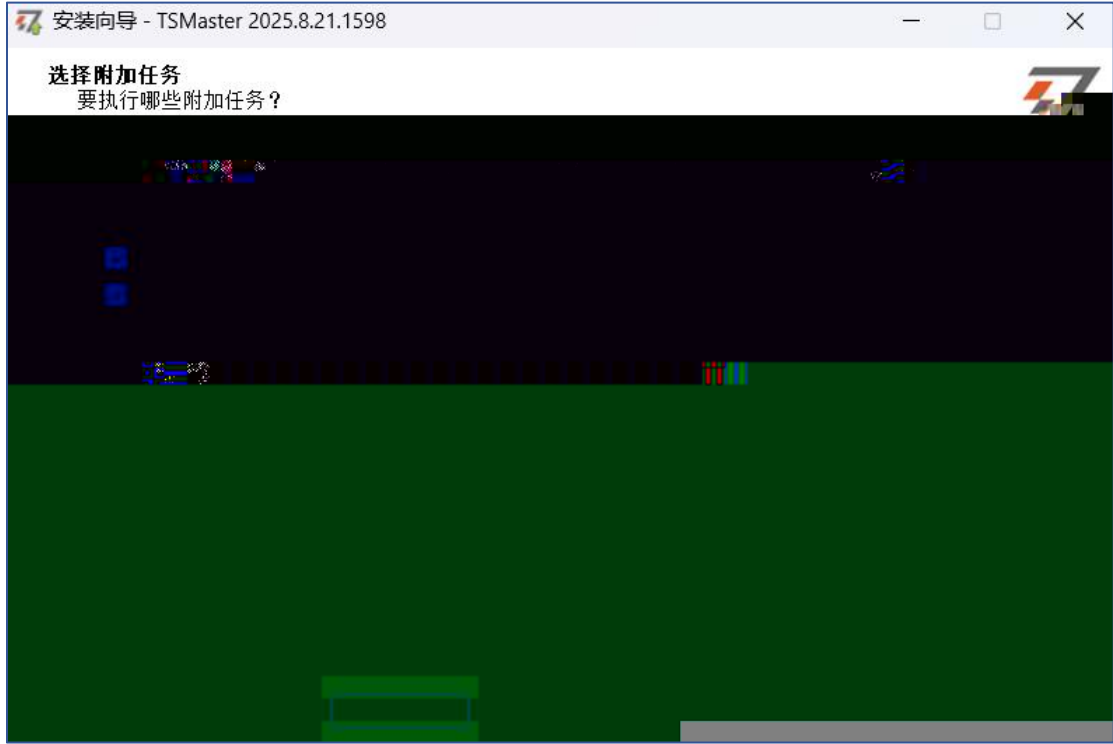

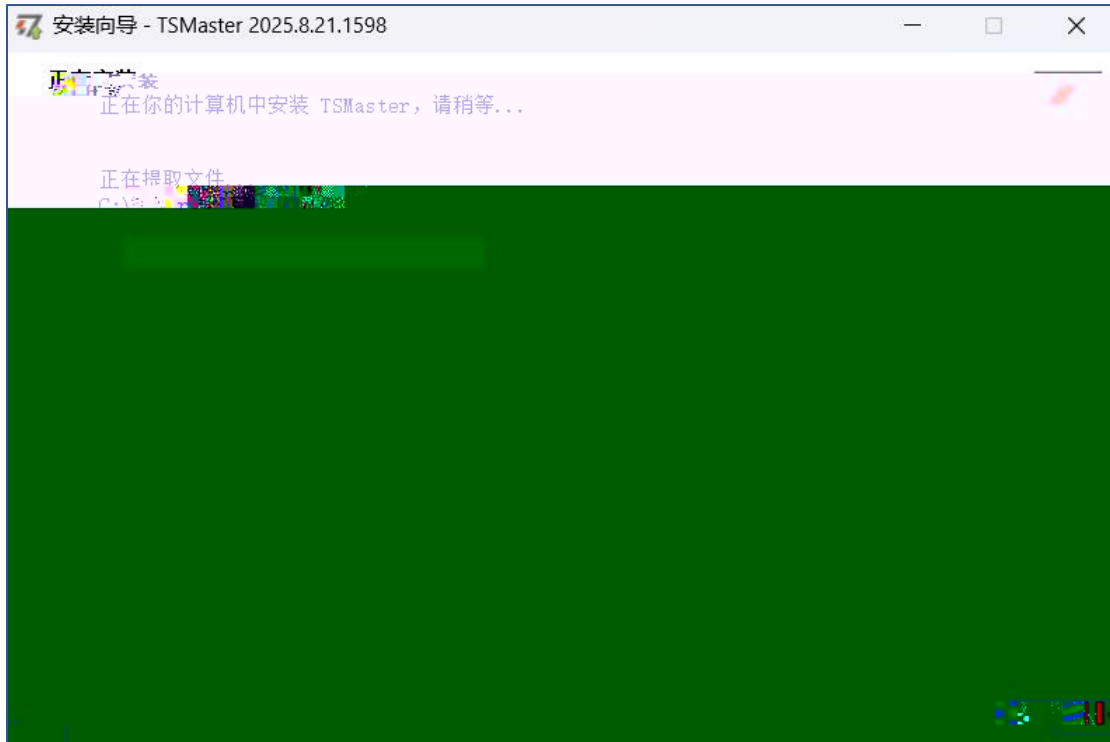











--	--	--	--

---

