




TC1017

8路CAN/CAN FD转USB接口

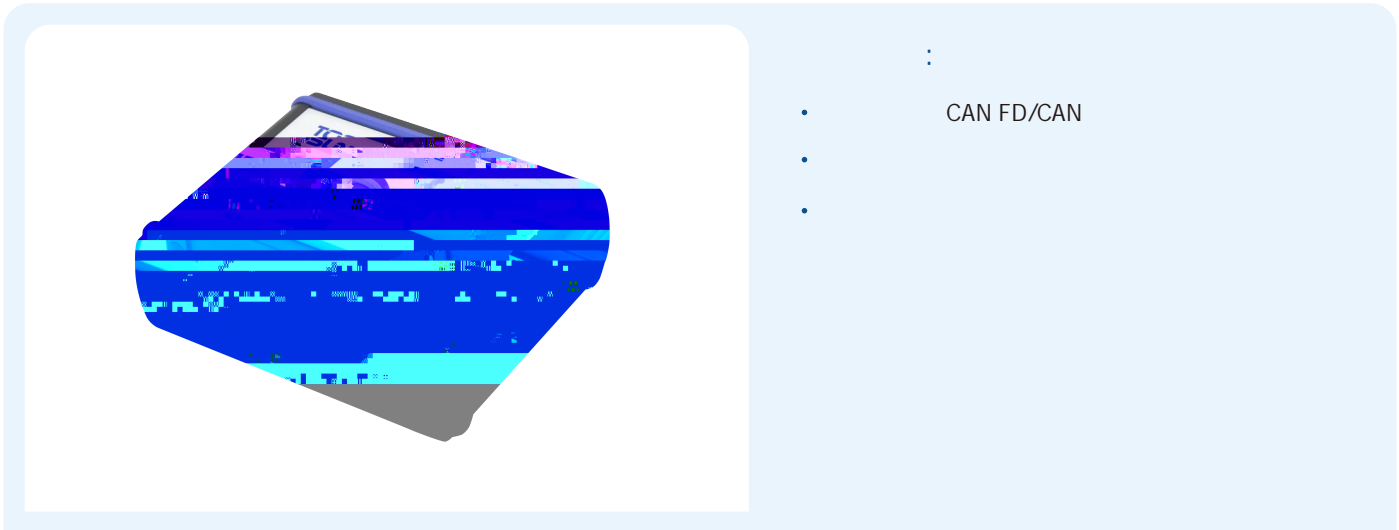

- CAN FD/CAN
-
-

功能概述

TC1017 8 CAN FD USB
 CAN FD/CAN
 TSMaster DBC ARXML
 CAN FD
 UDS ECU CCP/XCP
 Windows Linux API
 C++ C# LabView Python

产品特性

- us
- Windows Linux
- 8 CAN FD (USB 4 8)
- DB-9
- CAN DC2500V
- DBC A2L ASC ARXML
- BLF ASC /
- UDS CCP/XCP
- UDS Flash Bootloader
-
- Windows Linux API
- TSMaster license
-

硬件技术参数

| | | | | |
|--------|----------------|------------|---------------|---------------|
| | 8*CAN FD | | | |
| PC | USB2.0 | | | |
| CAN | DB37 | | | |
| | Windows Linux | | | |
| | 700 CAN/CAN FD | | | |
| CAN | CAN2.0A B | ISO11898-1 | 125Kbps—1Mbps | |
| CAN FD | ISO | ISO | CAN FD | 125Kbps-8Mbps |
| | 1us | | | |
| | 120 | | | |
| * | 20000 / | | | |
| * | 20000 / | | | |
| | CAN | DC2500V | ± 4KV | ± 8KV |
| | USB | +DC | 7-18V | |
| | 4W | | | |
| | 108*88*35mm | | | |
| | 258g | | | |
| | -40 ~75 | | | |
| | 10% | 90% | | |

* 1Mbps 0

订购信息

| | | |
|--|--------|------------------|
| | TC1017 | 8 CAN/CAN FD USB |
|--|--------|------------------|

发货清单

- TC1017
- USB *1
- DB37 8 *1
- 12V2A *1

引脚定义

